



# Product Data Sheet

**Midland Brick**

A BORAL COMPANY

CLAY FACE BRICK

## Amber Contempo Range

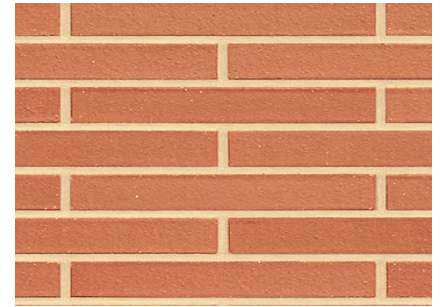


Product Information	Cored	Solid
Work Size (mm)	290 x 90 x 47	290 x 90 x 47
Dimensional Category	DW1	DW1
Approximate Unit Weight (kg)	2.0	2.6
Approximate No. per m <sup>2</sup>	58.5	58.5
No. Per Pack	432	432
Nominal Pack Weight (kg) <sup>1</sup>	890	1157
Characteristic Unconfined Compressive Strength (MPa) <i>f'</i> <sub>uc</sub>	>12	>12
Cold Water Absorption (%)	<10	<10
Coefficient of Expansion (mm/m)	<0.8	<0.8
Durability Class	General Purpose	General Purpose
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<1.4	<1.4
Potential to Effloresce	Nil to Slight	Nil to Slight
Liability to Lime Pitting	Nil	Nil
Core Percentage	<30	-
Solar Absorption Rating	Medium to Dark	Medium to Dark
Fire Resistance – Insulation (minutes)	60	60

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic condition. Colours are indicative only. Information subject to change without notice.

<sup>1</sup>Includes +3% moisture

### Contempo Clay Face Bricks



Amber



Black



Copper



Grey



Ivory

Note: If you require specific or improved product specifications please contact your Sales Representative.

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.


# Product Data Sheet

**Midland Brick**

A BORAL COMPANY

CLAY FACE BRICK

## Black Contempo Range




Product Information	Cored	Solid
Work Size (mm)	290 x 90 x 47	290 x 90 x 47
Dimensional Category	DW1	DW1
Approximate Unit Weight (kg)	2.0	2.6
Approximate No. per m <sup>2</sup>	58.5	58.5
No. Per Pack	432	432
Nominal Pack Weight (kg) <sup>1</sup>	890	1157
Characteristic Unconfined Compressive Strength (MPa) <i>f'</i> <sub>uc</sub>	>12	>12
Cold Water Absorption (%)	<10	<10
Coefficient of Expansion (mm/m)	<0.8	<0.8
Durability Class	General Purpose	General Purpose
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<1.4	<1.4
Potential to Effloresce	Nil to Slight	Nil to Slight
Liability to Lime Pitting	Nil	Nil
Core Percentage	<30	-
Solar Absorption Rating	Dark	Dark
Fire Resistance – Insulation (minutes)	60	60


This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic condition. Colours are indicative only. Information subject to change without notice.

<sup>1</sup>Includes +3% moisture

### Contempo Clay Face Bricks




Amber



Black



Copper



Grey



Ivory

Note: If you require specific or improved product specifications please contact your Sales Representative.

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.


# Product Data Sheet

**Midland Brick**

A BORAL COMPANY

CLAY FACE BRICK

## Copper Contempo Range




Product Information	Cored	Solid
Work Size (mm)	290 x 90 x 47	290 x 90 x 47
Dimensional Category	DW1	DW1
Approximate Unit Weight (kg)	2.0	2.6
Approximate No. per m <sup>2</sup>	58.5	58.5
No. Per Pack	432	432
Nominal Pack Weight (kg) <sup>1</sup>	890	1157
Characteristic Unconfined Compressive Strength (MPa) <i>f'</i> <sub>uc</sub>	>12	>12
Cold Water Absorption (%)	<10	<10
Coefficient of Expansion (mm/m)	<0.8	<0.8
Durability Class	General Purpose	General Purpose
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<1.4	<1.4
Potential to Effloresce	Nil to Slight	Nil to Slight
Liability to Lime Pitting	Nil	Nil
Core Percentage	<30	-
Solar Absorption Rating	Dark	Dark
Fire Resistance – Insulation (minutes)	60	60

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic condition. Colours are indicative only. Information subject to change without notice.

<sup>1</sup>Includes +3% moisture

### Contempo Clay Face Bricks



Amber



Black



Copper



Grey



Ivory

Note: If you require specific or improved product specifications please contact your Sales Representative.

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.


# Product Data Sheet

**Midland Brick**

A BORAL COMPANY

CLAY FACE BRICK

## Grey Contempo Range




Product Information	Cored	Solid
Work Size (mm)	290 x 90 x 47	290 x 90 x 47
Dimensional Category	DW1	DW1
Approximate Unit Weight (kg)	2.0	2.6
Approximate No. per m <sup>2</sup>	58.5	58.5
No. Per Pack	432	432
Nominal Pack Weight (kg) <sup>1</sup>	890	1157
Characteristic Unconfined Compressive Strength (MPa) <i>f'</i> <sub>uc</sub>	>12	>12
Cold Water Absorption (%)	<10	<10
Coefficient of Expansion (mm/m)	<0.8	<0.8
Durability Class	General Purpose	General Purpose
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<1.4	<1.4
Potential to Effloresce	Nil to Slight	Nil to Slight
Liability to Lime Pitting	Nil	Nil
Core Percentage	<30	-
Solar Absorption Rating	Medium to Dark	Medium to Dark
Fire Resistance – Insulation (minutes)	60	60

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic condition. Colours are indicative only. Information subject to change without notice.

<sup>1</sup>Includes +3% moisture

### Contempo Clay Face Bricks




Amber



Black



Copper



Grey



Ivory

Note: If you require specific or improved product specifications please contact your Sales Representative.

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.


# Product Data Sheet

**Midland Brick**

A BORAL COMPANY

CLAY FACE BRICK

## Ivory Contempo Range




Product Information	Cored	Solid
Work Size (mm)	290 x 90 x 47	290 x 90 x 47
Dimensional Category	DW1	DW1
Approximate Unit Weight (kg)	1.9	2.6
Approximate No. per m <sup>2</sup>	58.5	58.5
No. Per Pack	432	432
Nominal Pack Weight (kg) <sup>1</sup>	845	1112
Characteristic Unconfined Compressive Strength (MPa) <i>f'</i> <sub>uc</sub>	>12	>12
Cold Water Absorption (%)	<10	<10
Coefficient of Expansion (mm/m)	<0.8	<0.8
Durability Class	General Purpose	General Purpose
Initial Rate of Absorption (kg/m <sup>2</sup> /min)	<1.4	<1.4
Potential to Effloresce	Nil to Slight	Nil to Slight
Liability to Lime Pitting	Nil	Nil
Core Percentage	<30	-
Solar Absorption Rating	Light	Light
Fire Resistance – Insulation (minutes)	60	60

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic condition. Colours are indicative only. Information subject to change without notice.

<sup>1</sup>Includes +3% moisture

### Contempo Clay Face Bricks




Amber



Black



Copper



Grey



Ivory

Note: If you require specific or improved product specifications please contact your Sales Representative.

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.