
A BORAL COMPANY

MASONRY PAVER

Charcoal Pavestone Classic 60mm





Midland Brick

Product Information	
Work Size (mm)	230 x 114 x 60
Dimensional Category	DPA2
CMAA Shape Category	Туре С
Approximate Dry Unit Weight (kg)	3.4
Approximate No. per m ²	38.1
No. Per Pack	330
Nominal Pack Weight (kg) ³	1156
Breaking Load (kN) ¹	>6
Mean Abrasion Index (V _a) ²	<10
Slip Resistance Category	P5
Cold Water Absorption (%)	<5
Coefficient of Contraction (mm/m)	<0.8
Durability Class	General Purpose
Potential to Effloresce	Slight to Moderate
Liability to Lime Pitting	Nil
Solar Absorption Rating	Dark


This technical information represents average properties obtained from productions runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days

² At 90 days

³ Includes +3% moisture

Pavestone Classic 60mm Masonry Paver Range




Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

A BORAL COMPANY

MASONRY PAVER

Donnybrook Pavestone Classic 60mm





Midland Brick

Product Information	
Work Size (mm)	230 x 114 x 60
Dimensional Category	DPA2
CMAA Shape Category	Туре С
Approximate Dry Unit Weight (kg)	3.4
Approximate No. per m ²	38.1
No. Per Pack	330
Nominal Pack Weight (kg) ³	1156
Breaking Load (kN) ¹	>6
Mean Abrasion Index (V _a) ²	<10
Slip Resistance Category	P5
Cold Water Absorption (%)	<5
Coefficient of Contraction (mm/m)	<0.8
Durability Class	General Purpose
Potential to Effloresce	Slight
Liability to Lime Pitting	Nil
Solar Absorption Rating	Medium to Dark


This technical information represents average properties obtained from productions runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days

² At 90 days

³ Includes +3% moisture

Pavestone Classic 60mm Masonry Paver Range




Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

A BORAL COMPANY

MASONRY PAVER

Heritage Red Pavestone Classic 60mm





Midland Brick

Product Information	
Work Size (mm)	230 x 114 x 60
Dimensional Category	DPA2
CMAA Shape Category	Туре С
Approximate Dry Unit Weight (kg)	3.4
Approximate No. per m ²	38.1
No. Per Pack	330
Nominal Pack Weight (kg) ³	1156
Breaking Load (kN) ¹	>6
Mean Abrasion Index (V _a) ²	<10
Slip Resistance Category	P5
Cold Water Absorption (%)	<5
Coefficient of Contraction (mm/m)	<0.8
Durability Class	General Purpose
Potential to Effloresce	Slight
Liability to Lime Pitting	Nil
Solar Absorption Rating	Dark


This technical information represents average properties obtained from productions runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days

² At 90 days

³ Includes +3% moisture

Pavestone Classic 60mm Masonry Paver Range

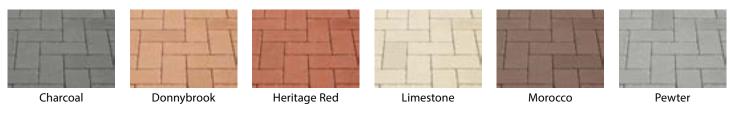


Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

A BORAL COMPANY

MASONRY PAVER

Limestone Pavestone Classic 60mm





Midland Brick

Product Information	
Work Size (mm)	230 x 114 x 60
Dimensional Category	DPA2
CMAA Shape Category	Туре С
Approximate Dry Unit Weight (kg)	3.4
Approximate No. per m ²	38.1
No. Per Pack	330
Nominal Pack Weight (kg) ³	1156
Breaking Load (kN) ¹	>6
Mean Abrasion Index (V _a) ²	<10
Slip Resistance Category	P5
Cold Water Absorption (%)	<5
Coefficient of Contraction (mm/m)	<0.8
Durability Class	General Purpose
Potential to Effloresce	Nil to Slight
Liability to Lime Pitting	Nil
Solar Absorption Rating	Light


This technical information represents average properties obtained from productions runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days

² At 90 days

³ Includes +3% moisture

Pavestone Classic 60mm Masonry Paver Range




Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

A BORAL COMPANY

MASONRY PAVER

Morocco Pavestone Classic 60mm





Midland Brick

Product Information	
Work Size (mm)	230 x 114 x 60
Dimensional Category	DPA2
CMAA Shape Category	Туре С
Approximate Dry Unit Weight (kg)	3.4
Approximate No. per m ²	38.1
No. Per Pack	330
Nominal Pack Weight (kg) ³	1156
Breaking Load (kN) ¹	>6
Mean Abrasion Index (V _a) ²	<10
Slip Resistance Category	P5
Cold Water Absorption (%)	<5
Coefficient of Contraction (mm/m)	<0.8
Durability Class	General Purpose
Potential to Effloresce	Slight
Liability to Lime Pitting	Nil
Solar Absorption Rating	Dark


This technical information represents average properties obtained from productions runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days

² At 90 days

³ Includes +3% moisture

Pavestone Classic 60mm Masonry Paver Range




Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

A BORAL COMPANY

MASONRY PAVER

Pewter Pavestone Classic 60mm





Midland Brick

Product Information	
Work Size (mm)	230 x 114 x 60
Dimensional Category	DPA2
CMAA Shape Category	Type C
Approximate Dry Unit Weight (kg)	3.4
Approximate No. per m ²	38.1
No. Per Pack	330
Nominal Pack Weight (kg) ³	1156
Breaking Load (kN) ¹	>6
Mean Abrasion Index (V _a) ²	<10
Slip Resistance Category	P5
Cold Water Absorption (%)	<5
Coefficient of Contraction (mm/m)	<0.8
Durability Class	General Purpose
Potential to Effloresce	Nil to Slight
Liability to Lime Pitting	Nil
Solar Absorption Rating	Medium


This technical information represents average properties obtained from productions runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days

² At 90 days

³ Includes +3% moisture

Pavestone Classic 60mm Masonry Paver Range



Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative