


Product Data Sheet

Midland Brick

A BORAL COMPANY

MASONRY PAVER

Autumn Blend Promenade Classic 40mm

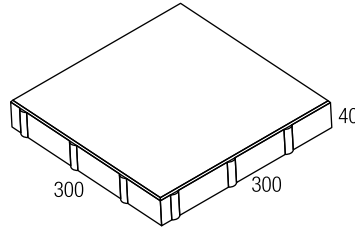

| Product Information | |
|--|-----------------|
| Work Size (mm) | 300 x 300 x 40 |
| Dimensional Category | DPA2 |
| CMAA Shape Category | Type C |
| Approximate Dry Unit Weight (kg) | 7.6 |
| Approximate No. per m ² | 11.1 |
| No. Per Pack | 224 |
| Nominal Pack Weight (kg) ³ | 1753 |
| Breaking Load (kN) ¹ | >5 |
| Mean Abrasion Index (V _a) ² | <12 |
| Slip Resistance Category | P5 |
| Cold Water Absorption (%) | <5 |
| Coefficient of Contraction (mm/m) | <0.8 |
| Durability Class | General Purpose |
| Potential to Effloresce | Slight |
| Liability to Lime Pitting | Nil |
| Solar Absorption Rating | Dark |

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days


² At 90 days

³ Includes +3% for moisture

Promenade Classic 40mm Masonry Paver Range



Autumn Blend



Charcoal




Donnybrook




Golden Sand




Heritage Red



Limestone



Morocco



Pewter



Steel Grey

Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.


Product Data Sheet

Midland Brick

A BORAL COMPANY

MASONRY PAVER

Charcoal Promenade Classic 40mm

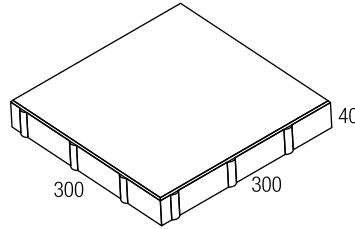

| Product Information | |
|--|--------------------|
| Work Size (mm) | 300 x 300 x 40 |
| Dimensional Category | DPA2 |
| CMAA Shape Category | Type C |
| Approximate Dry Unit Weight (kg) | 7.7 |
| Approximate No. per m ² | 11.1 |
| No. Per Pack | 224 |
| Nominal Pack Weight (kg) ³ | 1777 |
| Breaking Load (kN) ¹ | >5 |
| Mean Abrasion Index (V _a) ² | <12 |
| Slip Resistance Category | P5 |
| Cold Water Absorption (%) | <5 |
| Coefficient of Contraction (mm/m) | <0.8 |
| Durability Class | General Purpose |
| Potential to Effloresce | Slight to Moderate |
| Liability to Lime Pitting | Nil |
| Solar Absorption Rating | Dark |

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days


² At 90 days

³ Includes +3% for moisture

Promenade Classic 40mm Masonry Paver Range



Autumn Blend



Charcoal




Donnybrook




Golden Sand




Heritage Red



Limestone



Morocco



Pewter



Steel Grey

Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.


Product Data Sheet

Midland Brick

A BORAL COMPANY

MASONRY PAVER

Donnybrook Promenade Classic 40mm

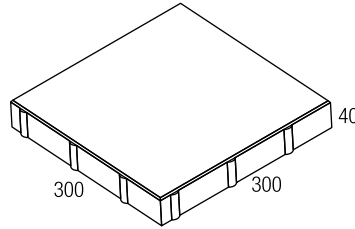

| Product Information | |
|--|-----------------|
| Work Size (mm) | 300 x 300 x 40 |
| Dimensional Category | DPA2 |
| CMAA Shape Category | Type C |
| Approximate Dry Unit Weight (kg) | 7.6 |
| Approximate No. per m ² | 11.1 |
| No. Per Pack | 224 |
| Nominal Pack Weight (kg) ³ | 1753 |
| Breaking Load (kN) ¹ | >5 |
| Mean Abrasion Index (V _a) ² | <12 |
| Slip Resistance Category | P5 |
| Cold Water Absorption (%) | <5 |
| Coefficient of Contraction (mm/m) | <0.8 |
| Durability Class | General Purpose |
| Potential to Effloresce | Slight |
| Liability to Lime Pitting | Nil |
| Solar Absorption Rating | Medium to Dark |

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days


² At 90 days

³ Includes +3% for moisture

Promenade Classic 40mm Masonry Paver Range



Autumn Blend



Charcoal



Donnybrook




Golden Sand




Heritage Red



Limestone



Morocco



Pewter



Steel Grey

Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.


Product Data Sheet

Midland Brick

A BORAL COMPANY

MASONRY PAVER

Golden Sand Promenade Classic 40mm

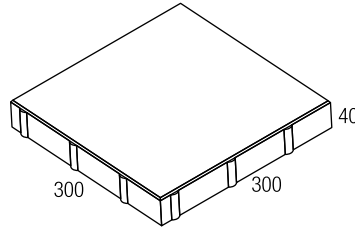

| Product Information | |
|--|-----------------|
| Work Size (mm) | 300 x 300 x 40 |
| Dimensional Category | DPA2 |
| CMAA Shape Category | Type C |
| Approximate Dry Unit Weight (kg) | 7.6 |
| Approximate No. per m ² | 11.1 |
| No. Per Pack | 224 |
| Nominal Pack Weight (kg) ³ | 1753 |
| Breaking Load (kN) ¹ | >5 |
| Mean Abrasion Index (V _a) ² | <12 |
| Slip Resistance Category | P5 |
| Cold Water Absorption (%) | <5 |
| Coefficient of Contraction (mm/m) | <0.8 |
| Durability Class | General Purpose |
| Potential to Effloresce | Slight |
| Liability to Lime Pitting | Nil |
| Solar Absorption Rating | Light |

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days


² At 90 days

³ Includes +3% for moisture

Promenade Classic 40mm Masonry Paver Range



Autumn Blend



Charcoal



Donnybrook



Golden Sand



Heritage Red



Limestone



Morocco



Pewter



Steel Grey

Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.


Product Data Sheet

Midland Brick

A BORAL COMPANY

MASONRY PAVER

Heritage Red Promenade Classic 40mm

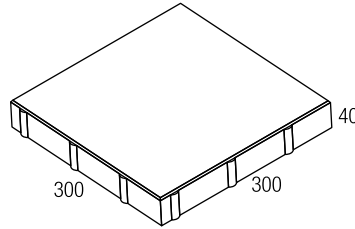

| Product Information | |
|--|-----------------|
| Work Size (mm) | 300 x 300 x 40 |
| Dimensional Category | DPA2 |
| CMAA Shape Category | Type C |
| Approximate Dry Unit Weight (kg) | 7.7 |
| Approximate No. per m ² | 11.1 |
| No. Per Pack | 224 |
| Nominal Pack Weight (kg) ³ | 1777 |
| Breaking Load (kN) ¹ | >5 |
| Mean Abrasion Index (V _a) ² | <12 |
| Slip Resistance Category | P5 |
| Cold Water Absorption (%) | <5 |
| Coefficient of Contraction (mm/m) | <0.8 |
| Durability Class | General Purpose |
| Potential to Effloresce | Slight |
| Liability to Lime Pitting | Nil |
| Solar Absorption Rating | Dark |

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days


² At 90 days

³ Includes +3% for moisture

Promenade Classic 40mm Masonry Paver Range



Autumn Blend



Charcoal



Donnybrook




Golden Sand




Heritage Red



Limestone



Morocco



Pewter



Steel Grey

Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.


Product Data Sheet

Midland Brick

A BORAL COMPANY

MASONRY PAVER

Limestone Promenade Classic 40mm

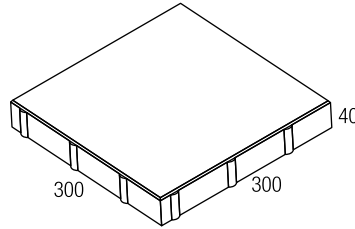

| Product Information | |
|--|-----------------|
| Work Size (mm) | 300 x 300 x 40 |
| Dimensional Category | DPA2 |
| CMAA Shape Category | Type C |
| Approximate Dry Unit Weight (kg) | 7.8 |
| Approximate No. per m ² | 11.1 |
| No. Per Pack | 224 |
| Nominal Pack Weight (kg) ³ | 1800 |
| Breaking Load (kN) ¹ | >5 |
| Mean Abrasion Index (V _a) ² | <12 |
| Slip Resistance Category | P5 |
| Cold Water Absorption (%) | <5 |
| Coefficient of Contraction (mm/m) | <0.8 |
| Durability Class | General Purpose |
| Potential to Effloresce | Nil to Slight |
| Liability to Lime Pitting | Nil |
| Solar Absorption Rating | Light |

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days


² At 90 days

³ Includes +3% for moisture

Promenade Classic 40mm Masonry Paver Range



Autumn Blend



Charcoal




Donnybrook




Golden Sand




Heritage Red



Limestone



Morocco



Pewter



Steel Grey

Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.


Product Data Sheet

Midland Brick

A BORAL COMPANY

MASONRY PAVER

Morocco Promenade Classic 40mm

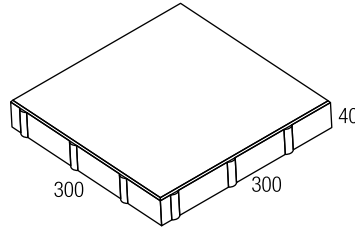

| Product Information | |
|--|-----------------|
| Work Size (mm) | 300 x 300 x 40 |
| Dimensional Category | DPA2 |
| CMAA Shape Category | Type C |
| Approximate Dry Unit Weight (kg) | 7.6 |
| Approximate No. per m ² | 11.1 |
| No. Per Pack | 224 |
| Nominal Pack Weight (kg) ³ | 1753 |
| Breaking Load (kN) ¹ | >5 |
| Mean Abrasion Index (V _a) ² | <12 |
| Slip Resistance Category | P5 |
| Cold Water Absorption (%) | <5 |
| Coefficient of Contraction (mm/m) | <0.8 |
| Durability Class | General Purpose |
| Potential to Effloresce | Slight |
| Liability to Lime Pitting | Nil |
| Solar Absorption Rating | Dark |

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days


² At 90 days

³ Includes +3% for moisture

Promenade Classic 40mm Masonry Paver Range



Autumn Blend



Charcoal



Donnybrook



Golden Sand



Heritage Red



Limestone



Morocco



Pewter



Steel Grey

Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.


Product Data Sheet

Midland Brick

A BORAL COMPANY

MASONRY PAVER

Pewter Promenade Classic 40mm

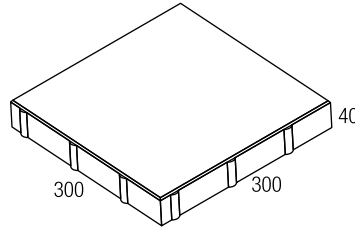

| Product Information | |
|--|-----------------|
| Work Size (mm) | 300 x 300 x 40 |
| Dimensional Category | DPA2 |
| CMAA Shape Category | Type C |
| Approximate Dry Unit Weight (kg) | 7.6 |
| Approximate No. per m ² | 11.1 |
| No. Per Pack | 224 |
| Nominal Pack Weight (kg) ³ | 1753 |
| Breaking Load (kN) ¹ | >5 |
| Mean Abrasion Index (V _a) ² | <12 |
| Slip Resistance Category | P5 |
| Cold Water Absorption (%) | <5 |
| Coefficient of Contraction (mm/m) | <0.8 |
| Durability Class | General Purpose |
| Potential to Effloresce | Slight |
| Liability to Lime Pitting | Nil |
| Solar Absorption Rating | Medium |

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days


² At 90 days

³ Includes +3% for moisture

Promenade Classic 40mm Masonry Paver Range



Autumn Blend



Charcoal



Donnybrook




Golden Sand




Heritage Red



Limestone



Morocco



Pewter



Steel Grey

Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.


Product Data Sheet

Midland Brick

A BORAL COMPANY

MASONRY PAVER

Steel Grey Promenade Classic 40mm

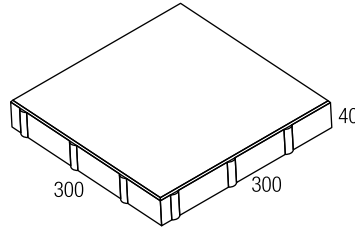

| Product Information | |
|--|-----------------|
| Work Size (mm) | 300 x 300 x 40 |
| Dimensional Category | DPA2 |
| CMAA Shape Category | Type C |
| Approximate Dry Unit Weight (kg) | 7.6 |
| Approximate No. per m ² | 11.1 |
| No. Per Pack | 224 |
| Nominal Pack Weight (kg) ³ | 1753 |
| Breaking Load (kN) ¹ | >5 |
| Mean Abrasion Index (V _a) ² | <12 |
| Slip Resistance Category | P5 |
| Cold Water Absorption (%) | <5 |
| Coefficient of Contraction (mm/m) | <0.8 |
| Durability Class | General Purpose |
| Potential to Effloresce | Slight |
| Liability to Lime Pitting | Nil |
| Solar Absorption Rating | Medium to Dark |

This technical information represents average properties obtained from production runs. If specific results are required, samples should be taken from current production runs. AS/NZS 4456 and 4586 are used as applicable. Durability classifications are based on product knowledge under local (Perth) climatic conditions. Colours are indicative only. Information subject to change without notice.

¹ At 28 days


² At 90 days

³ Includes +3% for moisture

Promenade Classic 40mm Masonry Paver Range



Autumn Blend



Charcoal




Donnybrook



Golden Sand



Heritage Red



Limestone



Morocco



Pewter



Steel Grey

Other colours available on request

Note: If you require specific or improved product specifications please contact your Sales Representative

DISCLAIMER. The information presented herein is supplied in good faith and to the best of our knowledge was correct at the time of preparation. No responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any errors or omissions. Users are advised to make their own determination as to the suitability of this information in relation to their particular purposes and specific circumstances. Since the information contained in this document may be applied under conditions beyond our control, no responsibility can be accepted by Midland Brick Company Pty Ltd, its staff or its agents for any loss or damage caused by any person acting or refraining from action as a result of this information.